



PB-K

nakrętki 6-kątne do wciskania

MATERIAŁ:

PB-K stal ocynkowana


1,0718 - 11SMnPb30

1,0715 - 11SMn30

PB-KS stal nierdzewna

1.4305 - X8CrNi 18-09

4.4301 - X5CrNi 18-10

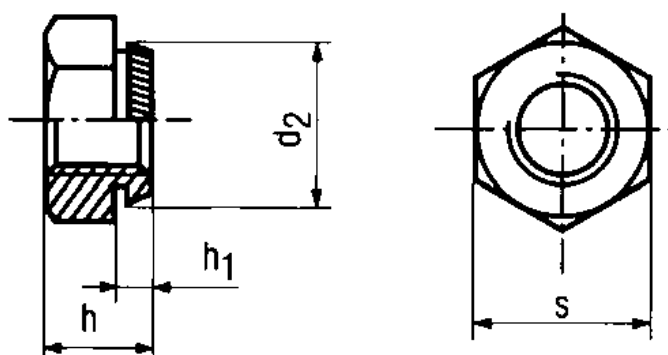

ROZMIAR	stal ocynkowana	stal nierdzewna	grubość mat. min.	Ø	s	d2	H kołnierza	H nakrętki
				otworu + .08 mm - .00 mm				
M2 x 0,4	PB-K 2-0	PB-KS 2,5-0	1	4,5	5,5	4,7	0,9	3
M2,5 x 0,45	PB-K 2,5-0	PB-KS 2,5-0	1	4,5	5,5	4,7	0,9	3
	PB-K 2,5-1	PB-KS 2,5-1	1,5				1,4	
	PB-K 2,5-2	PB-KS 2,5-2	2				1,8	
M3 x 0,5	PB-K 3-0	PB-KS 3-0	1	4,5	5,5	4,7	0,9	3
	PB-K 3-1	PB-KS 3-1	1,5				1,4	
	PB-K 3-2	PB-KS 3-2	2				1,8	
M4 x 0,7	PB-K 4-0	PB-KS 4-0	1	5,5	7	5,7	0,9	3,2
	PB-K 4-1	PB-KS 4-1	1,5				1,4	
	PB-K 4-2	PB-KS 4-2	2				1,8	
M5 x 0,8	PB-K 5-0	PB-KS 5-0	1	6,5	8	6,75	0,9	4
	PB-K 5-1	PB-KS 5-1	1,5				1,4	
	PB-K 5-3	PB-KS 5-2	2				1,8	
M6 x 1,0	PB-K 6-0	PB-KS 6-0	1	8	10	8,3	0,9	5
	PB-K 6-1	PB-KS 6-1	1,5				1,4	
	PB-K 6-2	PB-KS 6-2	2				1,8	
M8 x 1,25	PB-K 8	PB-KS 8	2	10	13	10,3	1,8	6,5
M10 x 1,5	PB-K 10	PB-KS 10	2	12,5	15	12,85	1,8	8
M12 x 1,75	PB-K 12	PB-KS 12	3	14,5	17	14,85	2,8	10
M16 x 2,0	PB-K 16	PB-KS 16	3	18,5	22	18,85	2,4	13
M20 x 2,5	PB-K 20	PB-KS 20	4	23	27	23,4	3,8	16